

BENCH SEAT


REMOVAL

1. Remove the rear subwoofer (if equipped) ([Refer to 08 - Electrical/8A - Audio and Video/Sub Woofer- Two Door/Removal and Installation](#)).
2. Lift the seat back release lever and fold the seat back forward.
3. Slowly lift the seat up to expose the release arm for the floor latches.



1 - Seat Back Release Lever

4. Squeeze on the release bar and lift the seat away from the holding brackets.
5. Turn the bench seat sideways and remove the seat from vehicle.

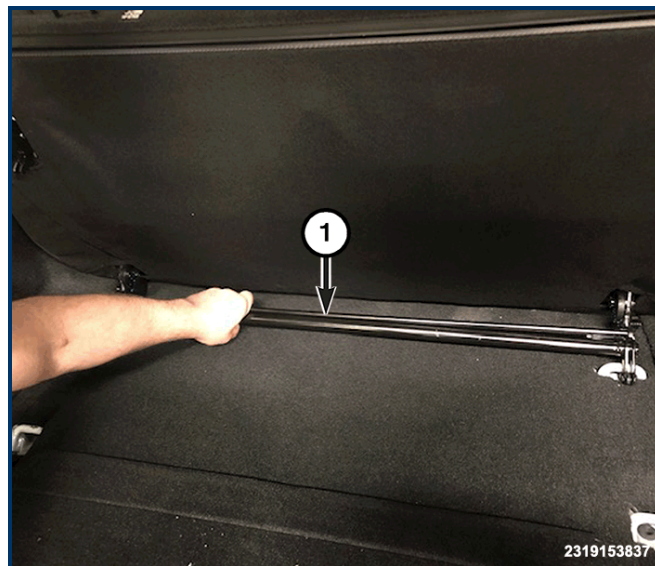

1 - Release Bar

INSTALLATION

Follow the removal procedure in reverse for general reassembly of the components on the vehicle.