

MAXIMUS-3



Roof Top Tent Install with Maximus-3 Roof Rack System

INSTALLATION GUIDES

PLEASE MAKE SURE YOU READ AND UNDERSTAND THE ENTIRE INSTALLATION GUIDE BEFORE YOU START. WE EXPECT YOU TO HAVE BASIC MECHANICAL ABILITIES TO PERFORM THIS INSTALLATION.

WE RECOMMEND THAT YOU SEPARATE AND IDENTIFY ALL THE PARTS AND HARDWARE KITS YOU RECEIVED WITH YOUR SHIPMENT BEFORE YOU PROCEED TO DISASSEMBLE YOUR JEEP.

Component List:

Qty

Carriage Bolts	4
Thick Washers	4
Nylon Spacers	4
Thins Washers	4
Lock Nuts	4
Rubber Cap	4



INSTALLATION:


Step 1: Symmetrically measure **927 MM** drill point for front and back mounting holes on you Roof Tent platform.

Step 2: Staring with pilot holes, drill mounting holes you marked in step (1) using a 3/8" drill bit.

Step 3: Install your hardware as shown below inserting the carriage bolts from the bottom of the tent platform.



Step 4: With help from a second person, lift your tent and drop the front bolts in back rectangular cutouts in the channel tracks in the planks. Now slide the tent forward until the back bolts drop in the channel tracks, then push forward further to your desired mount location.

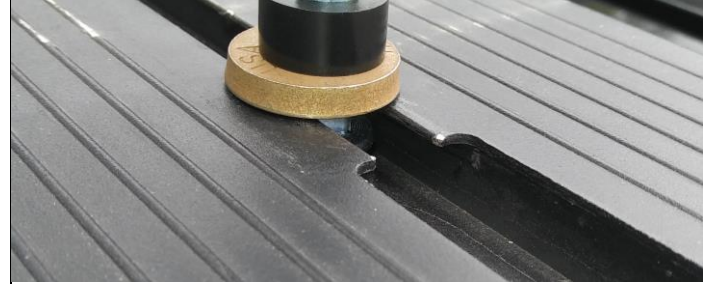

Step 5: Now tighten all 4 lock nuts from inside the tent. Add the rubber caps supplied on lock nuts to protect the mattress.



Your installation is complete. If you have questions regarding this installation, please contact us at info@maximus-3.com or call 248 821 6654.